



®


CE

AN ISO 9001 : 2015 CERTIFIED COMPANY



# AVON SWITCHGEARS PVT. LTD.

## ELEVATOR BUTTONS & ACCESSORIES CATALOGUE

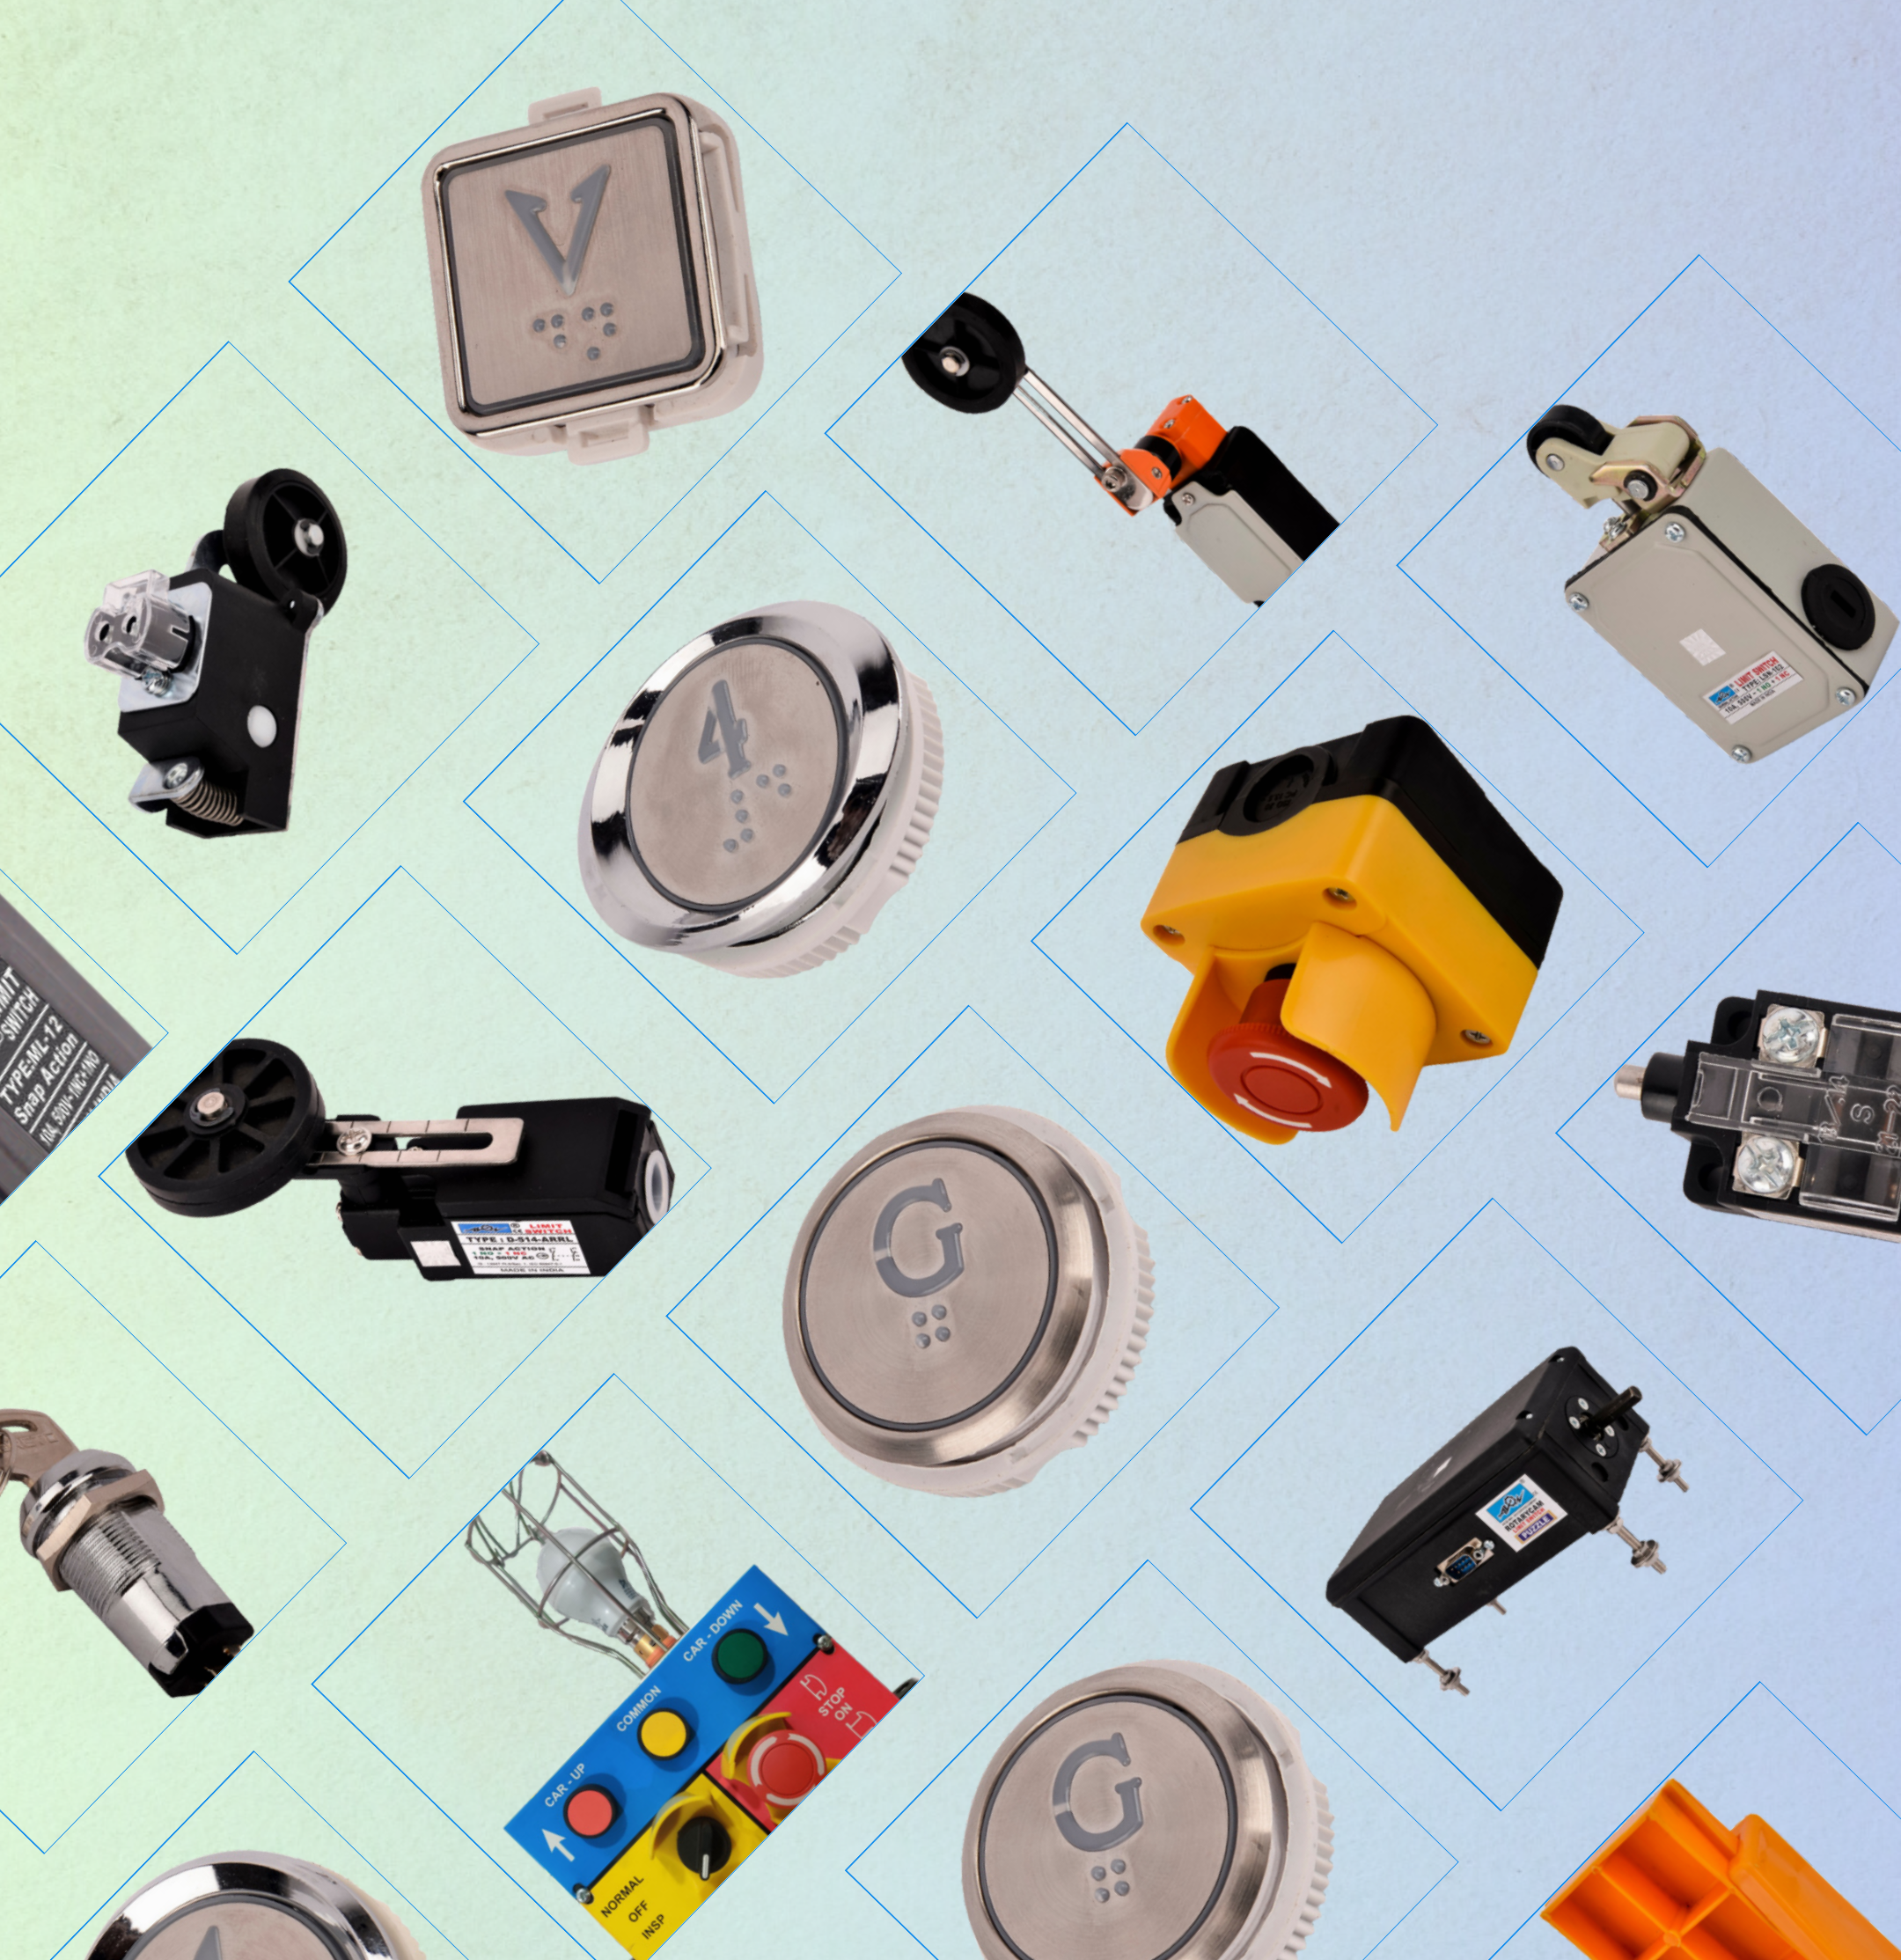

### WHY CHOOSE AVON

100% MADE IN INDIA

2 YEAR MANUFACTURER WARRANTY

VARIETY OF ELEVATOR BUTTONS

QUALITY & DURABILITY FIRST

[WWW.AVONSWITCHGEARS.COM](http://WWW.AVONSWITCHGEARS.COM)



## LB-08



### KEY FEATURES




Braille



Protrude Marking



Vandal-proof  
Class I

<b>Cut-out Dimension</b>	32.4 mm x 32.4 mm
<b>Fitting Type</b>	Clip Fitting
<b>Colors Available</b>	
<b>Light Type</b>	LED
<b>Switch Type</b>	Tact (Omron)
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	1 - 3 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)
<b>Can be customized (non-braille/Flat Marking) for quantity based orders</b>	

## LB-07



### KEY FEATURES




Braille



Protrude Marking



Vandal-proof  
Class I

<b>Cut-out Dimension</b>	35 mm x 35 mm
<b>Fitting Type</b>	Clip Fitting
<b>Colors Available</b>	
<b>Light Type</b>	LED
<b>Switch Type</b>	Tact (Omron)
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	1 - 3 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)
<b>Can be customized (non-braille/Flat Marking) for quantity based orders</b>	



## LB-06



### KEY FEATURES




Braille



Protrude Marking



Vandal-proof  
Class I

<b>Cut-out Dimension</b>	35.6 mm dia. with bottom notch
<b>Fitting Type</b>	Ring Fitting
<b>Colors Available</b>	
<b>Light Type</b>	LED
<b>Switch Type</b>	Tact (Omron)
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	1 - 3 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)
<b>Can be customized (non-braille/Flat Marking) for quantity based orders</b>	

## LB-05



### KEY FEATURES




Braille



Protrude Marking



Vandal-proof  
Class I

<b>Cut-out Dimension</b>	35.6 mm dia. with bottom notch
<b>Fitting Type</b>	Ring Fitting
<b>Colors Available</b>	
<b>Light Type</b>	LED
<b>Switch Type</b>	Tact (Omron)
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	1 - 3 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)
<b>Can be customized (non-braille/Flat Marking) for quantity based orders</b>	

## LB-02



### KEY FEATURES




Braille




Protrude Marking



Vandal-proof  
Class I

<b>Cut-out Dimension</b>	35.6 mm dia. with bottom notch
<b>Fitting Type</b>	Ring Fitting
<b>Colors Available</b>	
<b>Light Type</b>	LED
<b>Switch Type</b>	Tact (Omron)
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	1 - 3 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)
<b>Can be customized (non-braille/Flat Marking) for quantity based orders</b>	

## NLBC-SMALL EYE

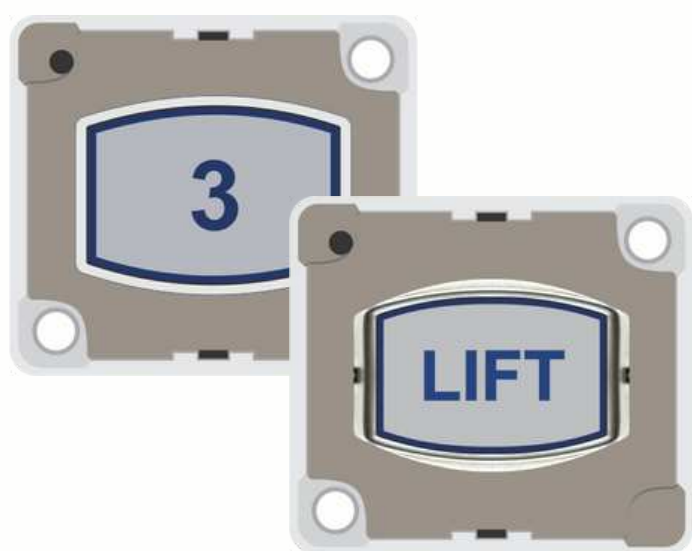


### KEY FEATURES



Durable




Vandal-proof  
Class I

<b>Design Configurations</b>	Outer ring available in SS Rings/Silver/Black. Button Sticker Available in Silver/Black.
<b>Fitting Type</b>	Studded
<b>Colors Available</b>	
<b>Light Type</b>	LED
<b>Switch Type</b>	Avon make
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	2 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)



## NLBC-BIG EYE

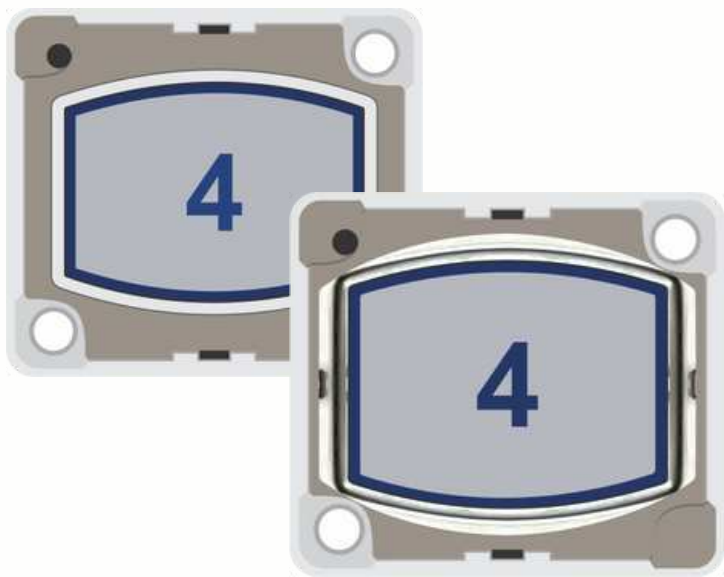

### KEY FEATURES




Durable



Vandal-proof  
Class I

<b>Design Configurations</b>	Outer ring available in SS Rings/Silver/Black. Button Sticker Available in Silver/Black.
<b>Fitting Type</b>	Studded
<b>Colors Available</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>Light Type</b>	LED
<b>Switch Type</b>	Avon make
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	2 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)

## NLBC-SQUARE

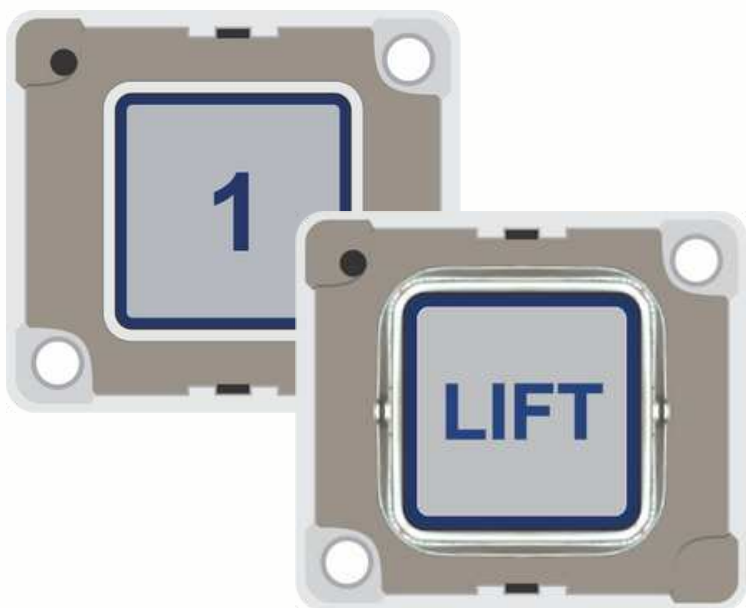

### KEY FEATURES




Durable



Vandal-proof  
Class I

<b>Design Configurations</b>	Outer ring available in SS Rings/Silver/Black. Button Sticker Available in Silver/Black.
<b>Fitting Type</b>	Studded
<b>Colors Available</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>Light Type</b>	LED
<b>Switch Type</b>	Avon make
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	2 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)

## NLBC-OVAL

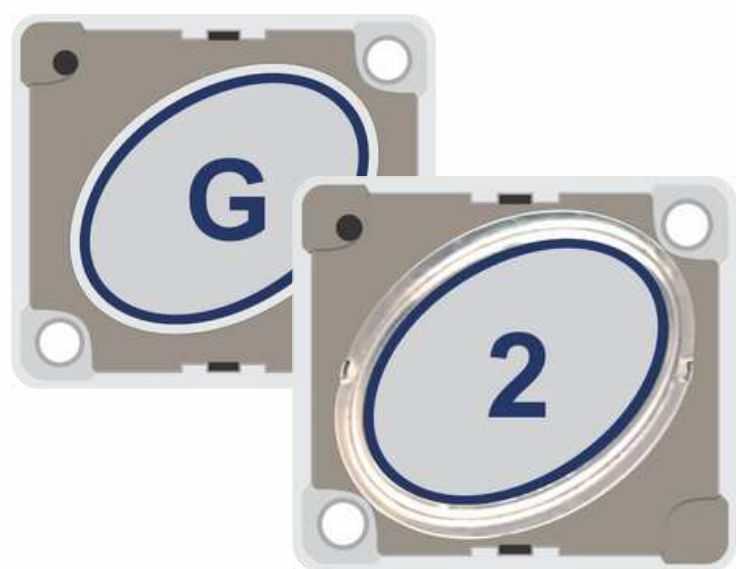


### KEY FEATURES



<b>Design Configurations</b>	Outer ring available in SS Rings/Silver/Black. Button Sticker Available in Silver/Black.
<b>Fitting Type</b>	Studded
<b>Colors Available</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>Light Type</b>	LED
<b>Switch Type</b>	Avon make
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	2 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)

## NLBC-ROUND

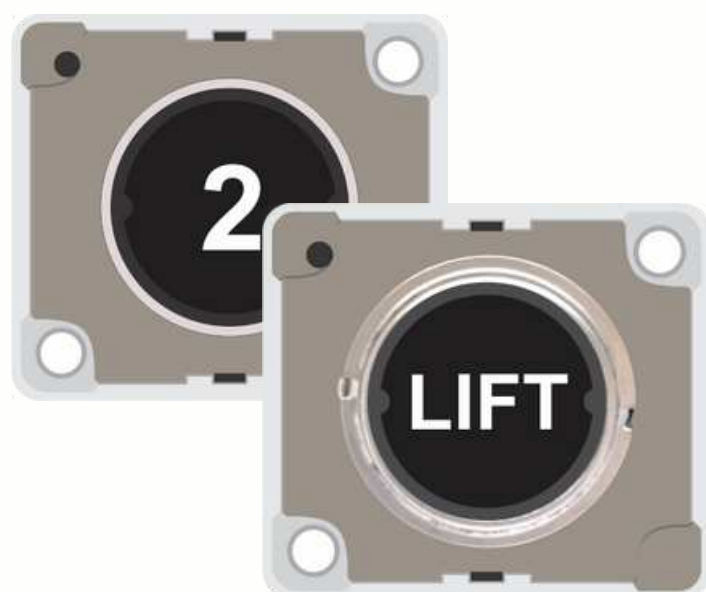

### KEY FEATURES



<b>Design Configurations</b>	Outer ring available in SS Rings/Silver/Black. Button Sticker Available in Silver/Black.
<b>Fitting Type</b>	Studded
<b>Colors Available</b>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<b>Light Type</b>	LED
<b>Switch Type</b>	Avon make
<b>Voltage</b>	12V/24V
<b>Rated Current</b>	32 mA +- 3.2 mA
<b>Operating Pressure</b>	2.5N-5N
<b>Thickness of Panel</b>	2 mm
<b>Numbering Configurations</b>	G+24/0/-1/-2/-3 P-P3/B-B3 L/M/S/C NS/Emergency Light Up/Down/Up-Down Door Open/Door Close OL (Overload)/Stop/Start Fan/Light/Phone (Symbol)





Elevator Maintenance  
Box w/ Actuators



Final Limit Switch  
AELS-A (NO)  
AELS-B (NC)



Elevator Cable  
Hanger



D Limit Switch  
(1NO + 1NC)  
D-514-ARRL (Snap)  
D-504-ARRL (Normal)



D Limit Switch  
(1NO + 1NC)  
D-514 (Snap)  
D-504 (Normal)




D Limit Switch  
(1NO + 1NC)  
D-514-ARL (Snap)  
D-504-ARL (Normal)



D Limit Switch  
(1NO + 1NC)  
D-512 (Snap)  
D-502 (Normal)



Fermator Dook  
Lock

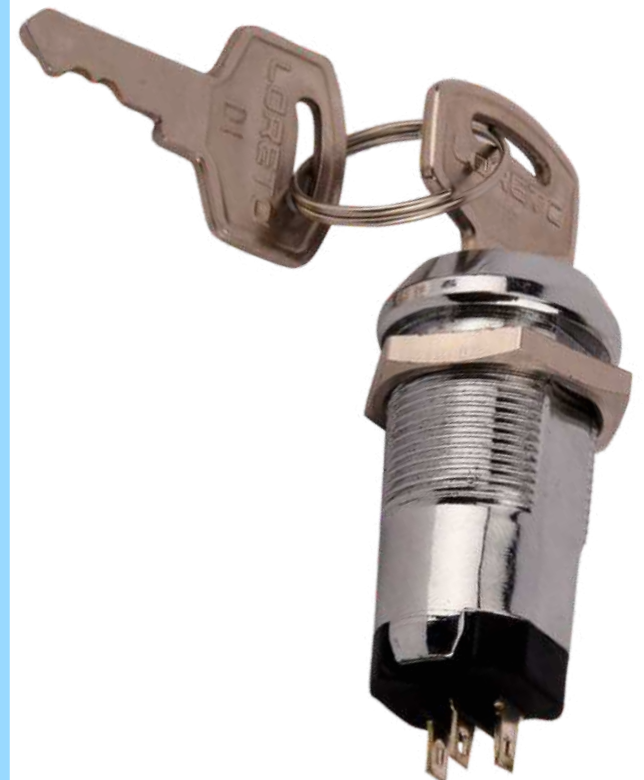

Key Lock  
Assembly





Elevator Pit Switch  
w/ Guard



M Limit Switch  
(1NO + 1NC)  
ML-12 (Snap)  
ML-02 (Normal)



ALS Contact Block  
(1NO + 1NC)  
ALS-011 (Snap)  
ALS-001 (Normal)



LSN Contact Block  
(1NO + 1NC)  
LSN-011 (Snap)  
LSN-001 (Normal)  
LSN-001/OL (Overlapping)



ALS Contact Block  
(1NO + 1NC)  
ALS-011/2WAY (Snap)



C Contact Block  
(1NO + 1NC)  
C-011 (Snap)  
C-001 (Normal)



Cargate Limit Switch  
LSN-112 (Snap)  
LSN-102 (Normal)



Cargate Oil-Tight  
Limit Switch  
LSN-212 (Snap)  
LSN-202 (Normal)



Limit Switch  
B-312 (Snap)  
B-302 (Normal)





Limit Switch  
B-312 (Snap)  
B-302 (Normal)



Limit Switch  
B-414 38 (Snap)  
B-404 38 (Normal)



Limit Switch  
B-314 38 (Snap)  
B-304 38 (Normal)



Limit Switch  
B-414 38 50 (Snap)  
B-404 38 50 (Normal)



Limit Switch  
B-314 38 50 (Snap)  
B-304 38 50 (Normal)



Limit Switch  
B-414 ARL (Snap)  
B-404 ARL (Normal)



Limit Switch  
B-314 ARL (Snap)  
B-304 ARL (Normal)



Limit Switch  
B-414 ARRL (Snap)  
B-404 ARRL (Normal)



Limit Switch  
B-314 ARRL (Snap)  
B-304 ARRL (Normal)






Limit Switch  
B-414 ANT (Snap)  
B-404 ANT (Normal)




Limit Switch  
B-314 ANT (Snap)  
B-304 ANT (Normal)




Rotary Cam Limit Switch  
for Car Parking Systems

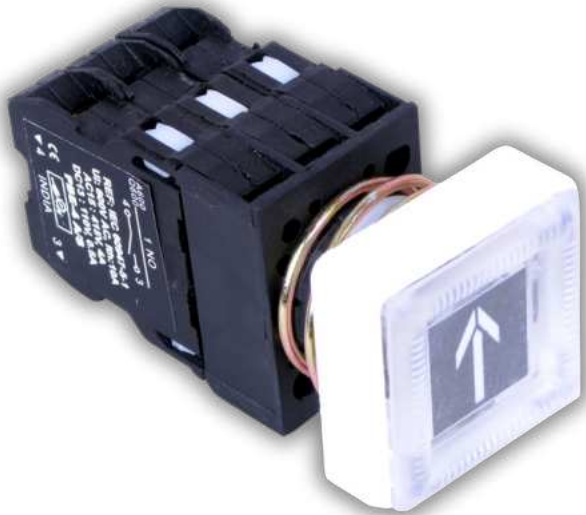

LPBL- Old Style Push  
Buttons

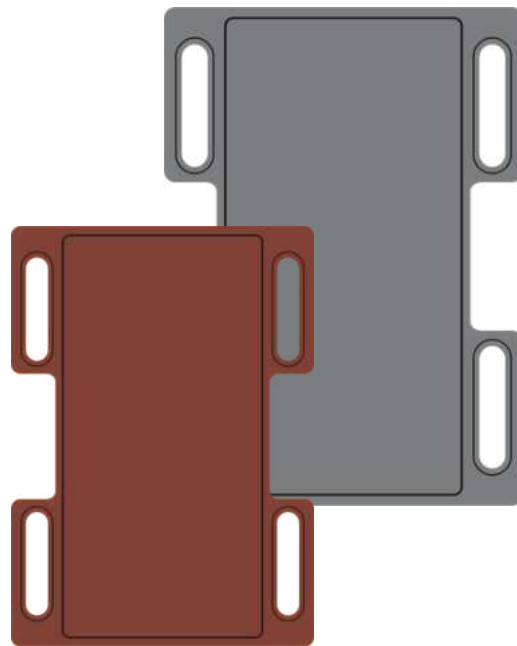

Display Windows  
45 \* 100  
55 \* 110

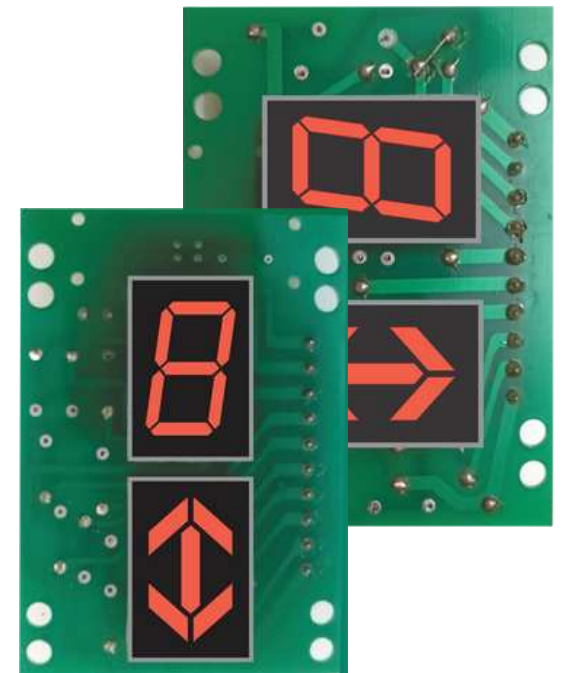

Seven Segment  
Dot Matrix Display Card